




TECTUL

CRUCETA - CLASE 150

MATERIALES

CARACTERÍSTICAS FÍSICAS

CARACTERÍSTICAS DIMENSIONALES

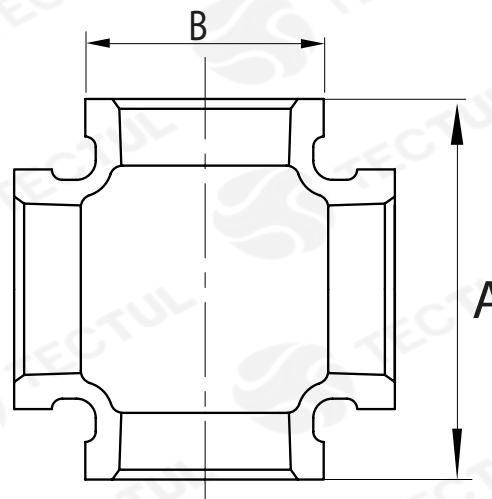

* Vista de sección transversal de tipo informativa. No representa una versión específica del accesorio o elemento.

MATERIALES

Fabricado en hierro maleable galvanizado. Recubierto ASTM A-197 ASTM A153 HOT-DIP (Caliente)

CARACTERÍSTICAS FÍSICAS

Cumple con los estándares de diseño ANSI/ASME B16.3 y B16.14. Extremos reforzados y estándar UL/FM

CARACTERÍSTICAS DIMENSIONALES

Dimensiones básicas según la Norma Nacional estadounidense. Con conexión roscada NPT según ANSI/ASME B1.20.1

DATOS TÉCNICOS

MEDIDA	ALTURA [mm] (A)	DIÁMETRO EXTERNO [mm] (B)	PASO DE ROSCA [H/In]	PESO [g]
1/4"	42,00	23,00	18	83
1/2"	56,00	30,00	14	139
3/4"	63,00	38,00	14	263
1"	74,00	45,00	11,5	364
1-1/4"	93,00	54,00	11,5	650
1-1/2"	96,00	49,30	11,5	704
2"	116,00	77,00	11,5	1384
2-1/2"	138,00	93,00	8	2543
3"	155,00	110,00	8	3547
4"	182,00	137,00	8	6860

* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.




TECTUL

CROSS - CLASS 150

MATERIALS

PHYSICAL CHARACTERISTICS

DIMENSIONAL CHARACTERISTICS

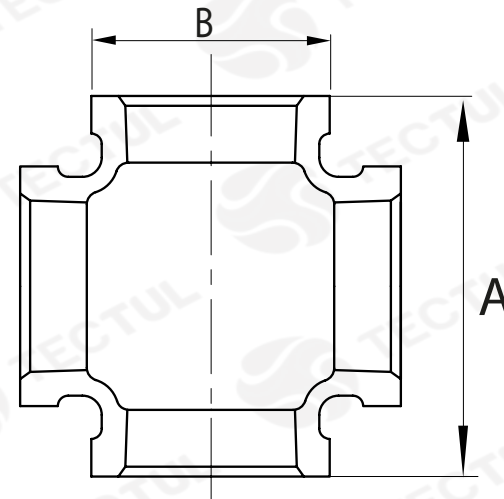

* Informational cross-sectional view. Does not represent a specific version of the accessory or item.

MATERIALS

Made of galvanized malleable iron
Coated ASTM A-197
ASTM A153 HOT-DIP (Hot)

PHYSICAL CHARACTERISTICS

Meets design standards
ANSI/ASME B16.3 and B16.14.
Reinforced ends and UL/FM standard

DIMENSIONAL CHARACTERISTICS

Basic dimensions according to the Standard
National American. With threaded
connection NPT per ANSI/ASME B1.20.1

TECHNICAL DATA

MEASURE	HEIGHT [mm] (A)	EXTERNAL DIAMETER [mm] (B)	THREAD PITCH [H/in]	WEIGHT [g]
1/4"	42,00	23,00	18	83
1/2"	56,00	30,00	14	139
3/4"	63,00	38,00	14	263
1"	74,00	45,00	11,5	364
1-1/4"	93,00	54,00	11,5	650
1-1/2"	96,00	49,30	11,5	704
2"	116,00	77,00	11,5	1384
2-1/2"	138,00	93,00	8	2543
3"	155,00	110,00	8	3547
4"	182,00	137,00	8	6860

* Reference photos and measurements, subject to change without prior notice from the supplier or manufacturer.