



# TECTUL

# MACHO REDUCIDO ALUMINIO

## MATERIALES

### CARACTERÍSTICAS FÍSICAS



### CARACTERÍSTICAS DIMENSIONALES




DATOS TÉCNICOS	
ATRIBUTO	DESCRIPCIÓN
Tipo de Pieza	Macho Reducido
Cuerpo	Aluminio
Rango Máximo de Presión	1/2" - 4" 150 PSI / 5" - 6" 75 PSI / 8" PSI
Temperatura	Ambiente
Características	Aleación de aluminio, diseñada especialmente para alta resistencia a la tensión, ligereza y rigidez.
Tipo de Rosca	NPT (Cónica - Rosca Tubería Nacional)
Conexión	Adaptador Manguera - Rosca NPT Macho

\* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.

## DATOS TÉCNICOS

MEDIDA ROSCA [In] (R1)	DIÁMETRO MANGUERA [In] (B)	DIÁMETRO INTERNO 1 [mm] (C1)	DIÁMETRO INTERNO 2 [mm] (C2)	INSERCIÓN MANGUERA [mm] (D)	ALTURA [mm] (E)	PESO (g)
3/4"	1/2"	14,30*	13,00*	38,60*	66,20*	36*
1"	1/2"	18,30*	13,00*	38,60*	60,60*	47*
1"	3/4"	18,30*	18,00*	37,40*	59,40*	44*
1 1/2"	1/2"	31,50*	13,00*	38,60*	67,60*	116*
1 1/2"	3/4"	31,50*	18,30*	37,40*	66,40*	51*
1 1/2"	1"	31,50*	24,50*	46,80*	75,80*	70*
1 1/2"	1 1/4"	31,50*	32,00*	56,60*	85,60*	76*
2"	1/2"	42,00*	13,00*	38,60*	72,10*	111*
2"	3/4"	42,00*	18,30*	37,40*	70,90*	220*
2"	1"	42,00*	24,50*	46,80*	80,30*	178*
2"	1 1/2"	42,00*	36,40*	57,30*	90,80*	198*
3"	3/4"	64,50*	18,30*	37,40*	76,00*	186*
3"	1"	64,50*	24,50*	46,80*	85,40*	203*
3"	1 1/2"	64,50*	36,40*	57,30*	95,90*	464*
3"	2"	64,50*	48,00*	73,80*	112,40*	375*
3"	2 1/2"	64,50*	57,80*	89,30*	127,90*	401*
4"	2"	87,20*	48,00*	73,80*	112,30*	472*
4"	3"	87,20*	72,00*	86,20*	124,70*	518*

\* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.

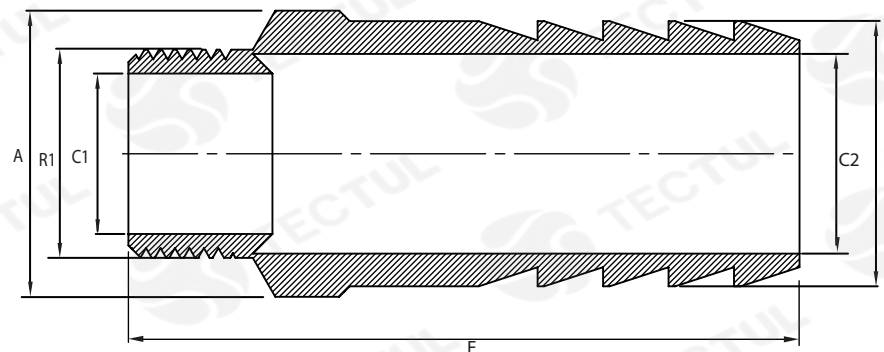

Última Revisión: Octubre 2021



# TECTUL

# ALUMINUM MALE REDUCED

## MATERIALS

## PHYSICAL CHARACTERISTICS



## DIMENSIONAL CHARACTERISTICS




TECNICAL DATA	
ATTRIBUTE	DESCRIPTION
Type of Piece	Male Reduced
Body	Aluminum
Maximun Pressure Range	1/2" - 4" 150 PSI / 5" - 6" 75 PSI
Temperature	Environment
Features	Aluminum alloy, specially designed for high tensile strength, lightness and rigidity.
Thread Type	NPT (Conical - National Pipe Thread)
Connection	Hose Adapter - Male NPT Thread

\* Reference photos and measurements, subject to change without prior notice from the supplier or manufacturer.

TECNICAL DATA						
THREAD SIZE [In] (R1)	HOSE DIAMETER [mm] (B)	INTERNAL DIAMETER 1 [mm] (C1)	INTERNAL DIAMETER 2 [mm] (C2)	HOSE INSERTION [mm] (D)	HEIGHT [mm] (E)	WEIGHT (g)
3/4"	1/2"	14,30*	13,00*	38,60*	66,20*	36*
1"	1/2"	18,30*	13,00*	38,60*	60,60*	47*
1"	3/4"	18,30*	18,00*	37,40*	59,40*	44*
1 1/2"	1/2"	31,50*	13,00*	38,60*	67,60*	116*
1 1/2"	3/4"	31,50*	18,30*	37,40*	66,40*	51*
1 1/2"	1"	31,50*	24,50*	46,80*	75,80*	70*
1 1/2"	1 1/4"	31,50*	32,00*	56,60*	85,60*	76*
2"	1/2"	42,00*	13,00*	38,60*	72,10*	111*
2"	3/4"	42,00*	18,30*	37,40*	70,90*	220*
2"	1"	42,00*	24,50*	46,80*	80,30*	178*
2"	1 1/2"	42,00*	36,40*	57,30*	90,80*	198*
3"	3/4"	64,50*	18,30*	37,40*	76,00*	186*
3"	1"	64,50*	24,50*	46,80*	85,40*	203*
3"	1 1/2"	64,50*	36,40*	57,30*	95,90*	464*
3"	2"	64,50*	48,00*	73,80*	112,40*	375*
3"	2 1/2"	64,50*	57,80*	89,30*	127,90*	401*
4"	2"	87,20*	48,00*	73,80*	112,30*	472*
4"	3"	87,20*	72,00*	86,20*	124,70*	518*

\* Reference photos and measurements, subject to change without prior notice from the supplier or manufacturer.

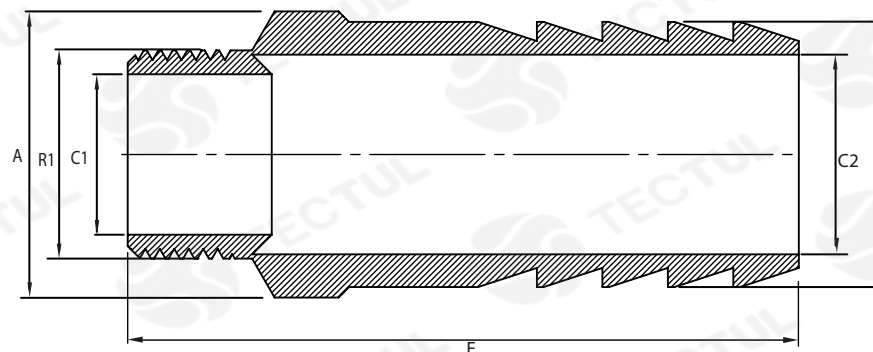

Last Revision: October 2021