




# TECTUL

## Tubo PE AL PE amarillo gas

### MATERIALES

### APLICACIONES

### NORMA

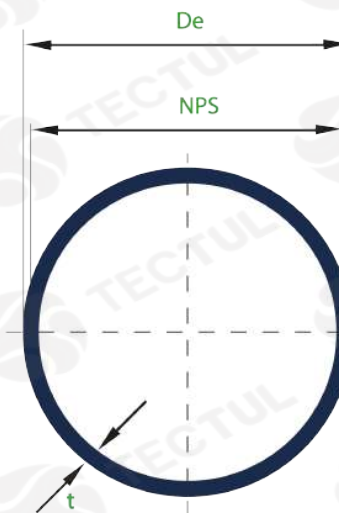

Sección transversal tubería PE AL PE



### MATERIALES

Tubería multicapa (POLIETILENO-ALUMINIO-POLIETILENO), proporciona fácil instalación y alta resistencia a la corrosión.



### APLICACIONES

Ideal para instalación de gas natural o propano, ya que es una tubería metálica que brinda resistencia y plasticidad proporcionando durabilidad.



### NORMA

ISO 17484-1  
NTC6015

Tubo PE-AL-PE

Diametro nominal NPS [in]	Diámetro nominal - NPS [mm]	Espesor de pared - t [mm]	Temperatura de trabajo	Presión de trabajo, max
1/2	16	1,60	0 - 40 °C	500 [KPa]
3/4	20	2,00		
1	25	2,20		
Rollos de 200 [mts] de longitud.				

\* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.



# TECTUL

## PE AL PE tube gas yellow

### MATERIALS




### APPLICATION



### STANDARD



Cross section PE-AL-PE pipe

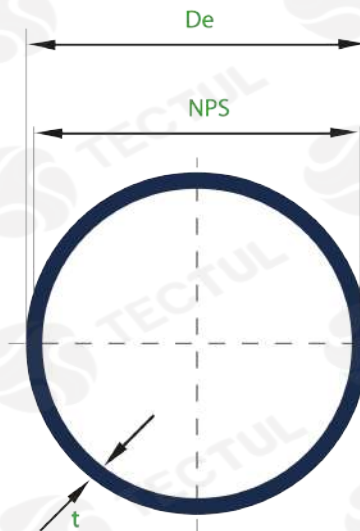

### MATERIALS

Multilayer pipe (POLYETHYLENE-ALUMINUM-POLYETHYLENE), provides easy installation and high resistance to corrosion.



### APPLICATION

Ideal for natural gas or propane installation, since it is a metallic pipe that provides resistance and plastic providing durability.



### STANDARD

ISO 17484-1  
NTC6015

Tubo PE-AL-PE				
Nominal diameter NPS [in]	Nominal diameter - NPS [mm]	Wall thickness - t [mm]	Work temperature	Work pressure, max
1/2	16	1,60	0 - 40 °C	500 [KPa]
3/4	20	2,00		
1	25	2,20		
Rolls of 200 [mts] in length.				

\* Reference photos and measurements, subject to change without prior notice from the supplier or manufacturer.