




TECTUL

UNIÓN UNIVERSAL - CLASE 150

MATERIALES

CARACTERÍSTICAS FÍSICAS

CARACTERÍSTICAS DIMENSIONALES

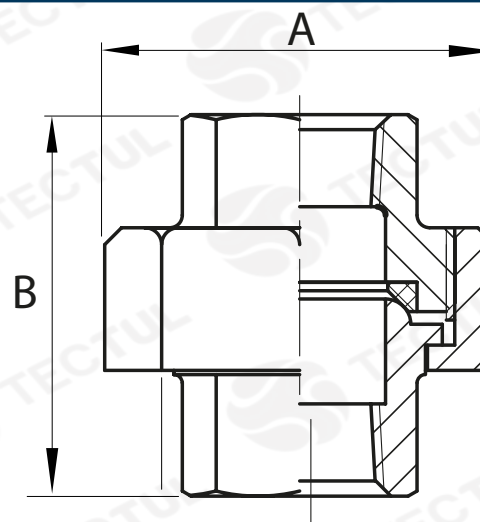

* Vista de sección transversal de tipo informativa. No representa una versión específica del accesorio o elemento.

MATERIALES

Fabricado en hierro maleable negro
Recubierto ASTM A-197
ASTM A153 HOT-DIP (Caliente)

CARACTERÍSTICAS FÍSICAS

Cumple con los estándares de diseño
ANSI/ASME B16.3 y B16.14.
Extremos reforzados y estándar UL/FM

CARACTERÍSTICAS DIMENSIONALES

Dimensiones básicas según la Norma
Nacional estadounidense. Con conexión
roscada NPT según ANSI/ASME B1.20.1

DATOS TÉCNICOS

MEDIDA	ANCHO [mm] (A)	ALTURA [mm] (B)	PASO DE ROSCA [H/In]	PESO [g]
1/4"	39,00*	43,60*	18	153*
3/8"	41,00*	41,40*	18	147*
1/2"	44,40*	47,20*	14	172*
3/4"	50,30*	53,20*	14	248*
1"	59,00*	54,00*	11,5	336*
1 1/4"	72,60*	57,00*	11,5	490*
1 1/2"	82,70*	62,40*	11,5	714*
2"	95,00*	69,70*	11,5	928*
2 1/2"	100,00*	120,30*	8	1653*
3"	110,00*	141,20*	8	2068*
4"	127,50*	160,40*	8	3707*
6"	145,00*	241,00*	8	4705*

* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.




TECTUL

UNION WITH BRASS SEAT - CLASS 150

MATERIALS

PHYSICAL CHARACTERISTICS

DIMENSIONAL CHARACTERISTICS

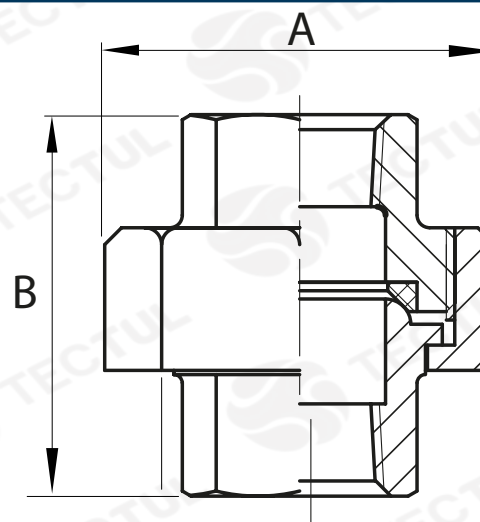

* Informational cross-sectional view. Does not represent a specific version of the accessory or item.

MATERIALS
 Made of black malleable iron
 ASTM A-197 coated
 ASTM A153 HOT-DIP (Hot)

PHYSICAL CHARACTERISTICS
 Meet design standards
 ANSI/ASME B16.3 and B16.14.
 UL/FM standard and reinforced ends

DIMENSIONAL CHARACTERISTICS
 Basic dimensions according to the Standard
 National American. With threaded
 connection NPT per ANSI/ASME B1.20.1

TECHNICAL DATA				
MEASURE	WIDTH [mm] (A)	HEIGHT [mm] (B)	THREAD PITCH [H/In]	WEIGHT [g]
1/4"	39,00*	43,60*	18	153*
3/8"	41,00*	41,40*	18	147*
1/2"	44,40*	47,20*	14	172*
3/4"	50,30*	53,20*	14	248*
1"	59,00*	54,00*	11,5	336*
1 1/4"	72,60*	57,00*	11,5	490*
1 1/2"	82,70*	62,40*	11,5	714*
2"	95,00*	69,70*	11,5	928*
2 1/2"	100,00*	120,30*	8	1653*
3"	110,00*	141,20*	8	2068*
4"	127,50*	160,40*	8	3707*
6"	145,00*	241,00*	8	4705*

* Reference photos and measurements, subject to change without prior notice from the supplier or manufacturer.