



# TECTUL


# CONCÉNTRICA SOLDABLE INOXIDABLE SCHEDULE 40

## MATERIALES

### CARACTERÍSTICAS FÍSICAS



### CARACTERÍSTICAS DIMENSIONALES

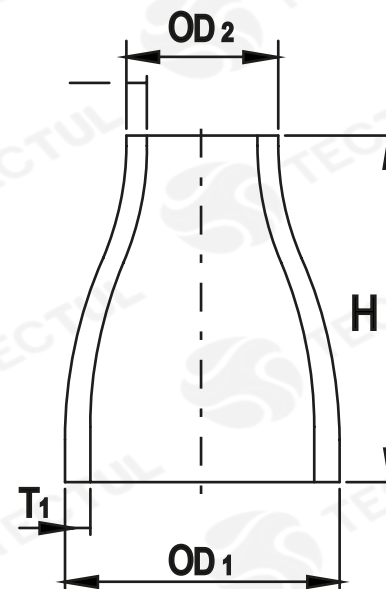

\* Vista de sección transversal de tipo informativa. No representa una versión específica del accesorio o elemento.

## MATERIALES

Fabricados acero inoxidable  
ASTM A403 304/304L

## CARACTERÍSTICAS FÍSICAS

Accesorios con conexión soldable  
Butt Weld. Para conducción de gases,  
ácidos, azucareras y proceso de alimentos

## CARACTERÍSTICAS DIMENSIONALES

Dimensiones básicas según la Norma  
Nacional estadounidense.  
ANSI/ASME B16.9 con extremos biselados

## DATOS TÉCNICOS

MEDIDA	DIÁMETRO INFERIOR (OD1) [mm]	DIÁMETRO SUPERIOR (OD2) [mm]	ESPESOR (T1) [mm]	ALTURA (H) [mm]	PESO [g]	MEDIDA	DIÁMETRO INFERIOR (OD1) [mm]	DIÁMETRO SUPERIOR (OD2) [mm]	ESPESOR (T1) [mm]	ALTURA (H) [mm]	PESO [g]
3/4" x 1/2"	26,67*	21,34*	2,87*	38,10*	60*	2" x 1-1/2"	60,32*	48,30*	3,91*	76,20*	322*
1" x 1/2"	33,40*	21,30*	3,38*	50,80*	105*	2-1/2" x 1-1/4"	73,02	42,20*	5,16*	88,90*	352*
1" x 3/4"	33,40*	26,70*	3,38*	50,80*	116*	2-1/2" x 1-1/2"	73,02	48,30*	5,16*	88,90*	372*
1-1/4" x 1/2"	42,16*	21,30*	3,56*	50,80*	150*	2-1/2" x 2"	73,02	60,30*	5,16*	88,90*	453*
1-1/4" x 3/4"	42,16*	26,70*	3,56*	50,80*	150*	3" x 1-1/2"	88,90*	42,20*	5,49*	101,60*	614*
1-1/4" x 1"	42,16*	33,40*	3,56*	50,80*	157*	3" x 2"	88,90*	42,20*	5,49*	101,60*	645*
1-1/2" x 3/4"	48,26*	26,70*	3,68*	63,50*	204*	3" x 2-1/2"	88,90*	42,20*	5,49*	101,60*	678*
1-1/2" x 1"	48,26*	33,40*	3,68*	63,50*	201*	4" x 2"	114,32*	42,20*	6,02*	101,60*	830*
1-1/2" x 1-1/4"	48,26*	42,20*	3,68*	63,50*	219*	4" x 2-1/2"	114,32*	42,20*	6,02*	101,60*	890*
2" x 1"	60,32*	33,40*	3,91*	76,20*	263*	4" x 3"	114,32*	42,20*	6,02*	101,60*	922*
2" x 1-1/4"	60,32*	42,20*	3,91*	76,20*	298*						

\* Fotos y medidas referenciales, sujetas a cambios sin previo aviso por parte del proveedor o fabricante.



# TECTUL

# BUTT WELD CONCENTRIC STAINLESS SCHEDULE 40


## MATERIALS



## PHYSICAL CHARACTERISTICS



## DIMENSIONAL CHARACTERISTICS

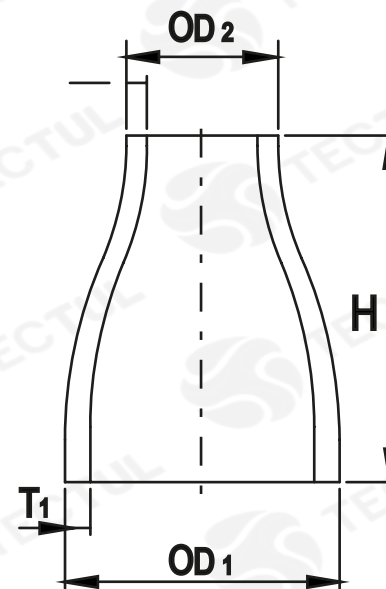

\* Informational cross-sectional view. Does not represent a specific version of the accessory or item.

## MATERIALS

Made of stainless steel  
ASTM A403 304/304L

## PHYSICAL CHARACTERISTICS

Accessories with solder connection  
Butt Weld. for gas conduction,  
acids, sugar and food processing

## DIMENSIONAL CHARACTERISTICS

Basic dimensions according to the Standard  
American National.  
ANSI/ASME B16.9 with beveled ends

## TECHNICAL DATA

MEASURE	BOTTOM DIAMETER (OD1) [mm]	TOP DIAMETER (OD2) [mm]	THICKNESS (T1) [mm]	HEIGHT (H) [mm]	WEIGHT [g]	MEASURE	BOTTOM DIAMETER (OD1) [mm]	TOP DIAMETER (OD2) [mm]	THICKNESS (T1) [mm]	HEIGHT (H) [mm]	WEIGHT [g]
3/4" x 1/2"	26,67*	21,34*	2,87*	38,10*	60*	2" x 1-1/2"	60,32*	48,30*	3,91*	76,20*	322*
1" x 1/2"	33,40*	21,30*	3,38*	50,80*	105*	2-1/2" x 1-1/4"	73,02	42,20*	5,16*	88,90*	352*
1" x 3/4"	33,40*	26,70*	3,38*	50,80*	116*	2-1/2" x 1-1/2"	73,02	48,30*	5,16*	88,90*	372*
1-1/4" x 1/2"	42,16*	21,30*	3,56*	50,80*	150*	2-1/2" x 2"	73,02	60,30*	5,16*	88,90*	453*
1-1/4" x 3/4"	42,16*	26,70*	3,56*	50,80*	150*	3" x 1-1/2"	88,90*	42,20*	5,49*	101,60*	614*
1-1/4" x 1"	42,16*	33,40*	3,56*	50,80*	157*	3" x 2"	88,90*	42,20*	5,49*	101,60*	645*
1-1/2" x 3/4"	48,26*	26,70*	3,68*	63,50*	204*	3" x 2-1/2"	88,90*	42,20*	5,49*	101,60*	678*
1-1/2" x 1"	48,26*	33,40*	3,68*	63,50*	201*	4" x 2"	114,32*	42,20*	6,02*	101,60*	830*
1-1/2" x 1-1/4"	48,26*	42,20*	3,68*	63,50*	219*	4" x 2-1/2"	114,32*	42,20*	6,02*	101,60*	890*
2" x 1"	60,32*	33,40*	3,91*	76,20*	263*	4" x 3"	114,32*	42,20*	6,02*	101,60*	922*
2" x 1-1/4"	60,32*	42,20*	3,91*	76,20*	298*						

\* Reference photos and measurements, subject to change without prior notice from the supplier or manufacturer.